




HoopBarn.com  
Kaufman Konstruktion, LLC  
Marion, SD  
1-800-497-1088

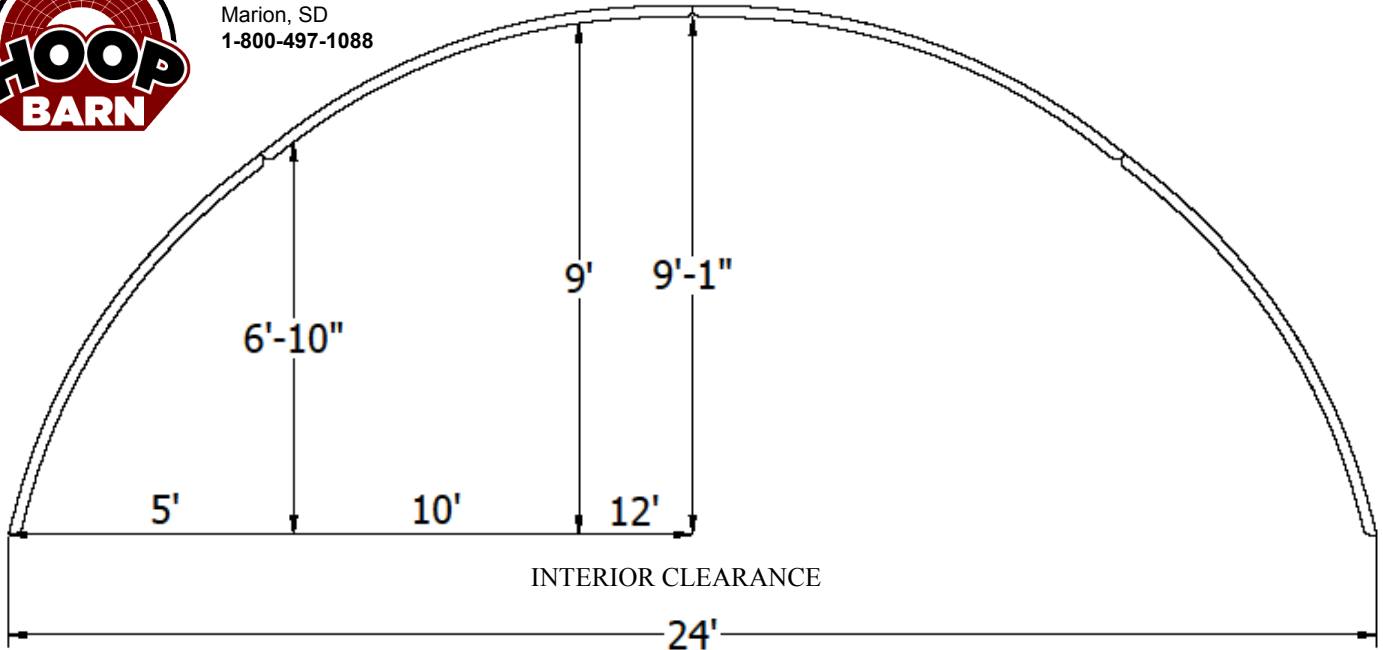

### FRAME COMPONENTS

**RAFTERS:** Constructed of 2-3/8 inch **12 gauge round Gatorshield® tube.**

**RAFTERS AND PURLINS:** easy to assemble; slip-together zinc plated joints—no taping of joints required. Easy shipping; each rafter has 4 sections and 3 rows of purlins.

**RAFTER SPACING:** Built with 6 foot spacing starting at 24' long.

**PONY WALL MODELS:** Designed to be set on wood or concrete. Flat base plates as standard. Walls must be at least 24-inches high to allow for tensioning, 6" minimum post or wall.

**Optional:** upgrade ratchets to 2" lashing winches.

mounting options: "L" brackets, oversize base plates.

**Included:** lag bolts, assembly bolts, 1" ratchets with mounting brackets.

**Not included:** posts, rub rail, baseboards or concrete anchors.

### FABRIC COVER

**FABRIC:** 12.5 oz tear resistant high density polyethylene with reinforced corners and pockets.

**COLORS:** White, Blue, Green, Red, Tan, Silver, Frost/translucent.

Available as solid colors (some colors may be up charged), with colored canastoga ends, or stripes.

**TENSIONING:** Pipe with tie down ratchets at every bow and end flaps .

### AVAILABLE OPTIONS

**END WALLS:** Steel uprights with fabric cover, includes standard D-Ring and lacing tensioning.

**Optional:** Upgrade 1" ratchet and pipe tensioning.

**END WALL SUPPORTS:** Heavy duty uprights with tabs for customer supplied girls and skin.

**DOORS:** Fabric roll-up or zippered doors available.

