




HoopBarn.com  
 Kaufman Konstruktion, LLC  
 Marion, SD  
 1-800-497-1088

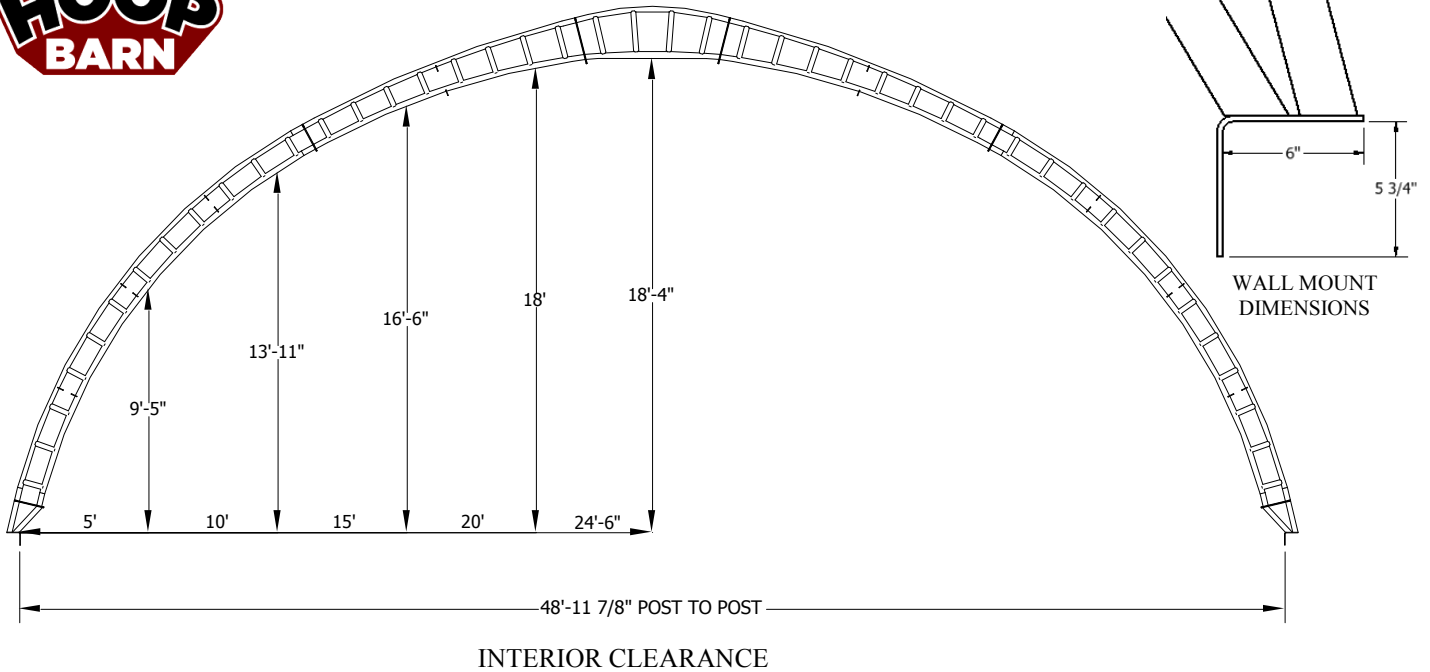

**FRAME COMPONENTS**

**RAFTERS:** Welded truss construction with 2 3/8-inch **12 gauge** top and bottom chords.  
**RAFTERS AND PURLINS:** "X" and/or straight bracing configured to application.  
**RAFTER SPACING:** 10-foot standard; 8-foot and 14-foot spacing available.  
**PONY WALL MODELS:** Designed to be set on wood or concrete.  
 Walls must be at least 24-inches high to allow for tensioning, 6" minimum post or wall.  
**Included:** 1/2" X 3.5" wood lag screws, assembly bolts, lashing winches with mounting brackets.  
**Not included:** posts, rub rail, or concrete anchors.

**FABRIC COVER**

**FABRIC:** 12.5 oz tear resistant high density polyethylene with reinforced corners and pockets.  
**COLORS:** White, Blue, Green, Red, Tan, Silver, Frost/translucent.  
 Available as solid colors (some colors may be up charged), with colored canastoga ends, or stripes.  
**TENSIONING:** Pipe and 2" lashing winch at each truss.  
 Standard end tension kit with ratchets spaced at 36"; high tension kit available.

**AVAILABLE OPTIONS**

**END WALLS:** Steel uprights with fabric cover; pipe and 2" lashing winch tensioning.  
**END WALL SUPPORTS:** Our standard uprights with tabs for customer supplied girts and skin.  
**HEADERS & DOORS:** Door headers up to 16ft. Fabric roll-up doors available.  
**RIDGE VENTS:** 8X16 top vent holes, partial or entire length of building.  
**SIDE CURTAINS:** Roll-Up curtain to allow ventilation or wind protection.

