
30' WIDE MONO TUBE BUILDING

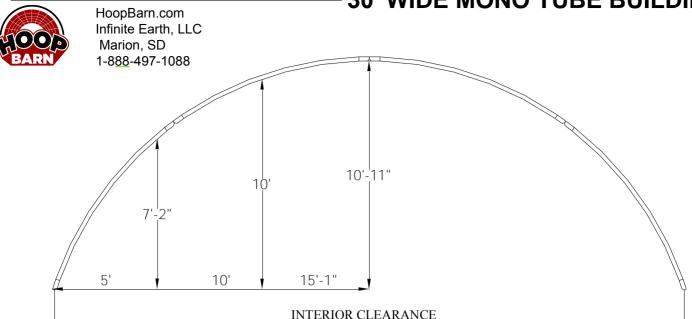

FRAME COMPONENTS

RAFTERS: Constructed of 2-3/8 inch 12 gauge round Gatorshield® tube.

RAFTERS AND PURLINS: easy to assemble; slip-together zinc plated joints—no taping of joints required. Easy shipping; each rafter has 4 sections and 3 rows of purlins.

-30'-

RAFTER SPACING: Built with 6 foot spacing starting at 24' long.

PONY WALL MODELS: Designed to be set on wood or concrete. Flat base plates as standard.

Walls must be at least 24-inches high to allow for tensioning, 6" minimum post or wall.

Optional: upgrade ratchets to 2" lashing winches.

mounting options: "L" brackets, oversize base plates.

Included: lag bolts, assembly bolts, 1" ratchets with mounting brackets.

Not included: posts, rub rail, baseboards or concrete anchors.

-FABRIC COVER

FABRIC: 12.5 oz tear resistant high density polyethylene with reinforced corners and pockets.

COLORS: White, Blue, Green, Red, Tan, Silver, Frost/translucent.

Available as solid colors (some colors may be up charged), with colored canastoga ends, or stripes.

TENSIONING: Pipe with tie down ratchets at every bow and end flaps.

-AVAILABLE OPTIONS

END WALLS: Steel uprights with fabric cover, includes standard D-Ring and lacing tensioning.

Optional: Upgrade 1" ratchet and pipe tensioning.

END WALL SUPPORTS: Heavy duty uprights with tabs for customer supplied girts and skin.

DOORS: Fabric roll-up or zippered doors available.

